

HAZE

Power to keep
you on the move

**Electric
Vehicle
Gel**

www.hazebattery.com

ELECTRIC VEHICLE
applications are wide and
varied with many
durability & power
demands placed firmly on
the batteries shoulders.

**HAZE ELECTRIC
VEHICLE GEL** always
delivers when you need it,
whatever your DC
requirement in extreme
situations.




**Tough ABS case with INSERT
TERMINALS** as standard, smaller
sizes with FASTON.

**Special Active Material
Formulation & Gel Technology**
delivers cranking amps, general
power and long/deep discharges
without the need for immediate
recharge.

EXTRA LONG CYCLE LIFE and
resistance to mechanical stress
and the elements all in one
battery.

	Dimensions mm - kg						Dimensions Inches - lbs						Cold Cranking Amps		
	Length	Width	Height Auto	Height Insert	Height Battery	Weight	Length	Width	Height Auto	Height Insert	Height Battery	Weight	20°C (68°F)	0°C (32°F)	-18°C (0°F)
HZY-EV12-100	306	168	229	212	211	28.3	12.05	6.61	9.02	8.35	8.31	59.4	820	715	520

	Volts	Thread size mm	Reserve Capacity - Mins					Capacity - Ampere Hour*						
			75 Amps	25 Amps	20 Amps	15 Amps	8 Amps	100 Hr	48 Hr	20 Hr	10 Hr	5 Hr	3 Hr	1 Hr
HZY-EV12-100	12	8	45	174	230	324	672	121	114	105	92.6	80.9	72.6	59.8

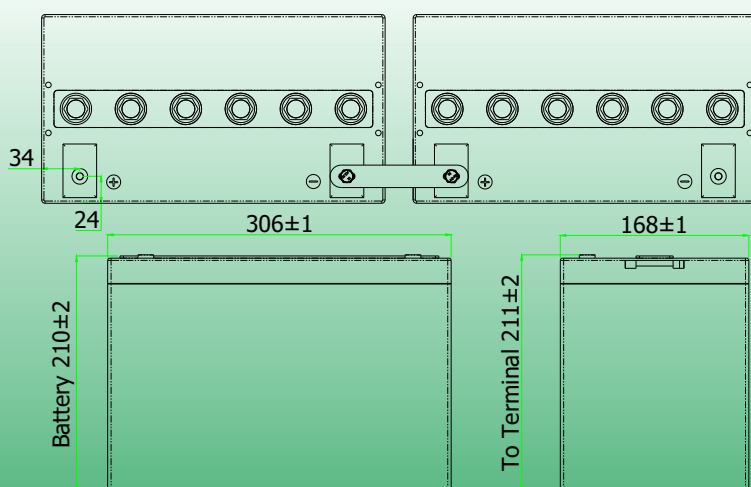

EV Charging - To obtain maximum cycle
life from your EV battery it is important that
a suitable charging profile is used.

For information about the Haze range of
chargers and the **Haze recommended
charging profile** contact your local Haze
distributor.

NOTE: All Haze Gel batteries are true Gel
batteries, plate chemistry is specifically for
cyclic applications, the microporous
polymer gel separator and the gelling
agents are European made and imported
specially for Gel production.

HAZE ELECTRIC VEHICLE GEL delivers maximum capacity within twenty cycles and
keeps delivering long after the others are on the scrap heap. HAZE R&D has resulted in
SPECIAL CHEMICAL and **PROCESS** technology to ensure consistency and performance.

06-11-13