


LHC12-22

(12V - 22AH)

TECHNICAL SPECIFICATIONS	
Cells per Unit	6
Voltage per Unit	12
Capacity (AH)	22
Weight (KG)	8
Terminal	F11 / M6
Reference Capacity (C20)	22
CCA	230



DIMENSIONS

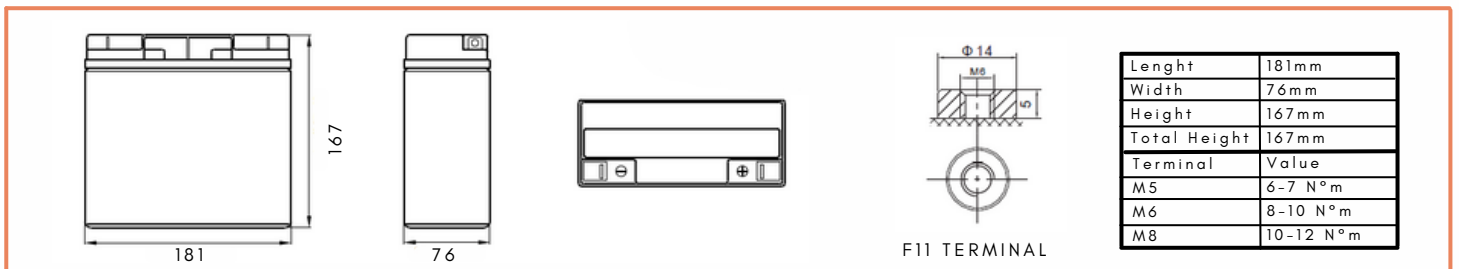

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values. The battery must be fully charged before the capacity test. The C 20 should reach 95% after the first cycle and 100% after the third cycle.

(Note) All of the above information could be changed without prior notice. IBS Italia reserves the right to explain and update the latest information.

